


Quick Start Guide

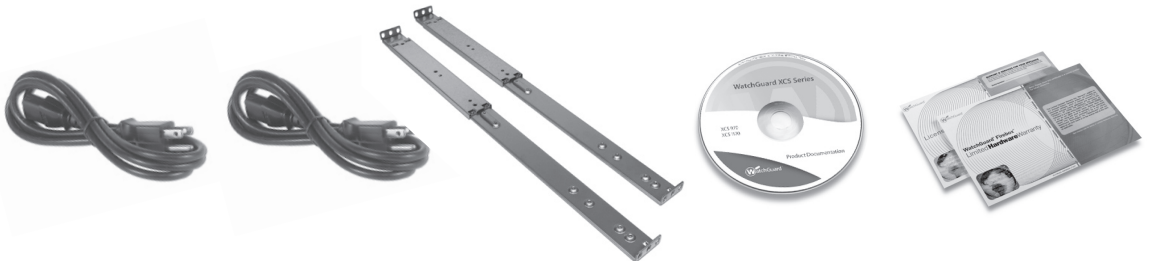

Registration and Configuration

1 Register with LiveSecurity® Service

- Find the serial number on your device and record it.
- Go to <http://www.watchguard.com/activate>
- Log in.

NOTE: If you are new to WatchGuard®, follow the instructions provided at the URL above to create a profile.

- Follow the instructions on the screen to enter your serial number and receive a feature key.

NOTE: If you will not have an Internet connection during the setup procedure, it is highly recommended to copy your feature key to a text file during the activation process.


2 Configuration Checklist

- To configure your WatchGuard device, you must collect the following information about your network:

	Example	User Setting
Hostname	hostname	
Domain Name	example.com	
IP Address	10.0.1.10	
Subnet Mask	255.255.0.0	
Gateway Address	10.0.1.1	
Name Server Address	10.0.2.53	
Default User ID	admin	
Default Password	admin	
Organization Name	example.com	
Server Admin Email	admin@example.com	
Serial Number	B0E112345-1234	

Connection and Installation

3 Connect your WatchGuard® XCS

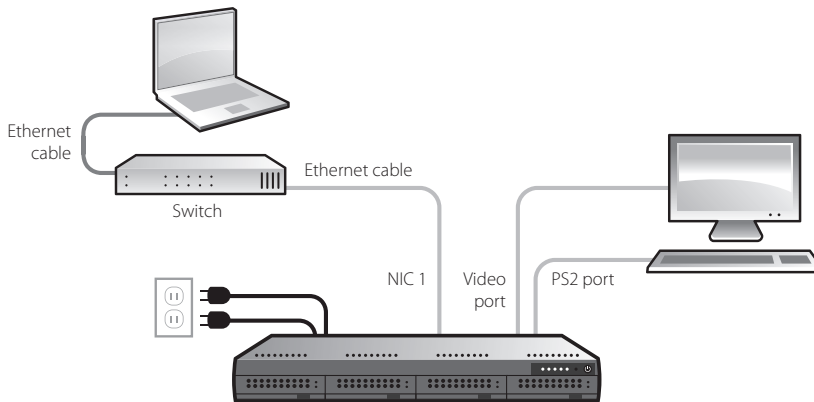

- Rack mount the device in a secure location.
- Connect a monitor and a keyboard to the connectors located on the back panel of the device.
- Connect the appliance directly to the LAN (Local Area Network) using the first Ethernet connector on the back panel.
- Connect the power cord to the power socket on the back panel of the device.

4 Console Installation


- Power on your device. After the system has booted, startup options are displayed on the monitor.
- Select **F2**, and then select **OK**.
NOTE: The F2 option is chosen by default after a few seconds.
- Select the **Auto** installation type. The file system is installed.
- Select **OK** to begin the Network configuration.
- Enter the Network Settings using the information from your checklist in Step 2, then select **OK**.
NOTE: At this point you only need to enter the network information for your LAN network connection to be able to connect to the device via a web browser in the following steps.
- Select a **Region, Country and Time zone**.
- The initial console configuration is now complete and the system console screen is displayed. You must now connect to the system using a web browser to continue with the remainder of the installation.
NOTE: After the console installation completes, the system displays a message warning that the "Mail System is stopped". This is normal. The Mail Delivery Settings must be configured before you start the mail system.

5

Web UI Setup Wizard

- Open a Web browser and enter the IP address of the device using the address entered in the network configuration in Step 4, such as: `https://10.0.1.10`.

NOTE: Because WatchGuard XCS uses a self-signed certificate, you will see a certificate warning in your browser. It is safe to ignore the warning (Internet Explorer) or to add a certificate exception (Mozilla Firefox).

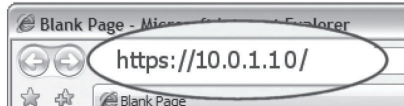

- On the Login screen enter the default user ID, **admin**, and the default password, **admin**.
- Enter the **Organization Name** and **Server Admin Email** address using the information from your Configuration Checklist in Step 2.

A screenshot of the WatchGuard Product Initialization web interface. The interface has a dark header with the WatchGuard logo. On the left, there is a vertical sidebar with a list of steps: "Step 1: Customer Information" (highlighted), "Step 2: Change Password", "Step 3: Intercept Settings", and "Done! Ready to go!". The main content area is titled "Product Initialization" and contains a form for "Step 1: Customer Information". The form has two input fields: "*Organization Name:" with the value "Organization Name" and "*Server Admin Email:" with the value "admin@example.com". Both fields have a checkmark icon to their right. Below the form, there are three buttons: "Complete Step 1", "Step 2: Change Password", and "Step 3: Intercept Settings". At the bottom, there is a "Done!" button.

- Change the default password.
 - Select your **Intercept Settings** for **Connection Control** and **Anti-Spam**.
 - Select **Continue** to complete the initialization.
 - The Web UI Setup Wizard is now complete, and the feature key page is displayed.
- NOTE: The mail system is initially in a stopped state. The Mail Delivery Settings must be configured before starting the mail system.

Next Steps

Congratulations! You have finished the basic setup of your WatchGuard® XCS. You can use the Web UI to continue all configuration and management tasks. Before you begin, we strongly recommend that you use the instructions on this page to:

- Add a Feature Key to the WatchGuard XCS
- Download Latest Software Updates
- Install Software Updates

Add a Feature Key to the WatchGuard XCS

- Log in to the Web UI.
- Select **Administration > System > Feature Key**, and then click **Update**.
- Copy the text of the feature key file you received in Step 1, and paste it in the text box.
- Click **Update Key**.

Download Latest Software Updates

The Security Connection feature contacts WatchGuard's support servers to check for new software updates.

- Log in to the Web UI.
- Select **Administration > Software Updates > Security Connection**.
- Select the **Enabled** option, and then enable the **Auto Download** option to allow software updates to be downloaded automatically.

NOTE: These updates will NOT be automatically installed. They must be installed manually via **Administration > Software Updates > Updates**.

- Click **Apply**, and then click the **Connect Now** button to run Security Connection immediately and check for new software updates.

Install Software Updates

- Select **Administration > Software Updates > Updates**.
- The **Software Updates** screen shows updates that are **Available Updates** (loaded onto the system, but not applied) and **Installed Updates** (applied and active).
- Updates downloaded by **Security Connection** will appear in the **Available Updates** section.
NOTE: If you downloaded an update manually, click **Browse** and navigate to the downloaded software update file on your local system, then click **Upload**.
- Select the software update in the **Available Updates** section, and then click **Install**.
NOTE: After applying software updates, the system must be restarted.

For more information about how to configure your WatchGuard XCS:

- See the WatchGuard XCS Installation Guide located on the Product Documentation CD.
- From the Web UI, select **Support > Online Manual**.
- Go to www.watchguard.com/help/documentation and download the WatchGuard XCS User Guide.

WATCHGUARD TECHNICAL SUPPORT

1.877.232.3531
(U.S. and Canada)

+1.206.613.0456
(all other countries)

www.watchguard.com/support

ADDRESS: 505 Fifth Avenue South, Suite 500, Seattle, WA 98104

WEB: www.watchguard.com • **U.S. SALES:** 1.800.734.9905 • **INTERNATIONAL SALES:** +1.206.613.0895

© 2009 WatchGuard Technologies, Inc. All rights reserved. WatchGuard, the WatchGuard Logo, Firebox, Firewall, Core, Peak, and LiveSecurity are either trademarks or registered trademarks of WatchGuard Technologies, Inc. in the United States and/or other countries. All other trademarks and tradenames are the property of their respective owners. P.N. 352-3708-001 102709 EN

